

FRENTE MOSTRADOR PRE-INSTALACIÓN SNACK CMR

**FRENTE MOSTRADOR SNACK REFRIGERACIÓN PRE-INSTALACIÓN / SNACK BACK
COUNTER CHILLER PREINSTALLATION**



CMRP



CMRP-V

CARACTERÍSTICAS GENERALES

- Exterior en acero inox AISI-304 18/10, excepto el respaldo
- Interior en acero inox AISI-304 18/10, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Luz interior en modelos puerta de cristal
- Encimera de acero inox AISI-304 18/10 con frente curvo y peto trasero sanitario de 100 mm (opcional sin peto según modelo)
- Estantes interiores de varilla en acero plastificado, regulables en altura, sobre apoyos inox
- Pies en tubo de acero inox ajustables en altura 125-200 mm
- Evaporador sistema tiro forzado, con recubrimiento anticorrosión
- Evaporación automática del agua de descarche de serie, excepto modelos pre-instalacion
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, bajo GWP y cero efecto ODP
- Control digital de temperatura y descarches, eficiente en la gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente
- Cajoneras inox refrigeradas desmontables sobre guías telescópicas con sistema autocierre


GENERAL FEATURES

- AISI-304 18/10 stainless steel exterior, except the rear side
- AISI-304 18/10 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Rear-door by stamped steel
- Interior light in glass door models
- AISI-304 18/10 stainless steel worktop, with round-edged front and 100 mm sanitary up stand (optional without up stand depending on model)
- Shelves made of plasticized steel wire, height adjustable by stainless steel supports
- AISI -304 18/10 adjustable legs, 125 to 200 mm
- Fan assisted evaporator, with anticorrosion coating.
- Automatic evaporation of defrost water as standard, except models preinstalation
- 40 Kg/m³ density polyurethane insulation, low GWP and zero ODP effect
- Energy efficient digital controller of temperature and defrosts
- Operating temperature 32°C ambient
- Removable stainless refrigerated drawers on telescopic guides with self-closing system

*Características técnicas y constructivas sujetas a variación sin previo aviso, todas las fotos deben ser consideradas como una referencia
Technical and constructive characteristics subject to variation without prior notice, all photos must be considered as a reference*

FRENTE MOSTRADOR SNACK CMR

FRENTE MOSTRADOR SNACK REFRIGERACIÓN / SNACK BACK COUNTER, CHILLER

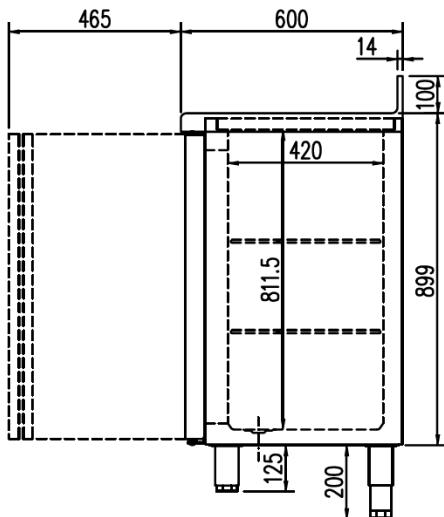

Modelo Model Modèle	Largo Length Longueur mm	Alto Height Hauteur mm	Fondo Depth Profondeur mm	Rango Range Gamme °C	Estantes Shelves Étagères	Capacidad Capacity Exposition L	Voltaje Voltage Tension	Refrig. Coolant Frigorigène	Potencia Frig. Frig Power Puissance Frig.	Consumo Nominal Nominal Consumption Consommation Nominale W	CCE EEC 2015/1094 EN16825	clase climate 2015/1094 EN16825
CMRP / CMRPV-120	1195	1040	600	-2°C +8°C	4	325	230 V - 50 Hz	R-134a	300	-	-	-
CMRP / CMRPV-170	1720	1040	600	-2°C +8°C	6	504	230 V - 50 Hz	R-134a	356	-	-	-
CMRP / CMRPV-220	2245	1040	600	-2°C +8°C	8	684	230 V - 50 Hz	R-134a	485	-	-	-
CMRP / CMRPV-270	2770	1040	600	-2°C +8°C	10	863	230 V - 50 Hz	R-134a	485	-	-	-

Características técnicas y constructivas sujetas a variación sin previo aviso, todas las fotos deben ser consideradas como una referencia
Technical and constructive characteristics subject to variation without prior notice, all photos must be considered as a reference